

Alpha Solar FFH 2P 2C 3000



Data Sheet/Installation Manual



www.emmanouilsa.com

1st Industrial Area
OT 1819, Volos TK38500
Greece

T/F: +30 24210 85233
@: info@emmanouilsa.com



Installation Safety

The maintenance of a safe and healthful working environment is of the utmost importance. Safety requirements must be considered fundamental to the construction of any project. It is essential that the workforce be trained to follow procedures consistent with applicable safety standards. Each person must be constantly alert to his or her personal obligation to observe safe operating procedures. The continued cooperation of all personnel is required to support and sustain an effective safety environment.



Make sure that all machine operators are trained in the use and safety of all machinery and are licensed to use the equipment.

Use of the following is Mandatory for Safety:



Hard Hat



Safety Footwear




Protective Clothing



Eye Protection




High Visibility Vest



Hearing Protection





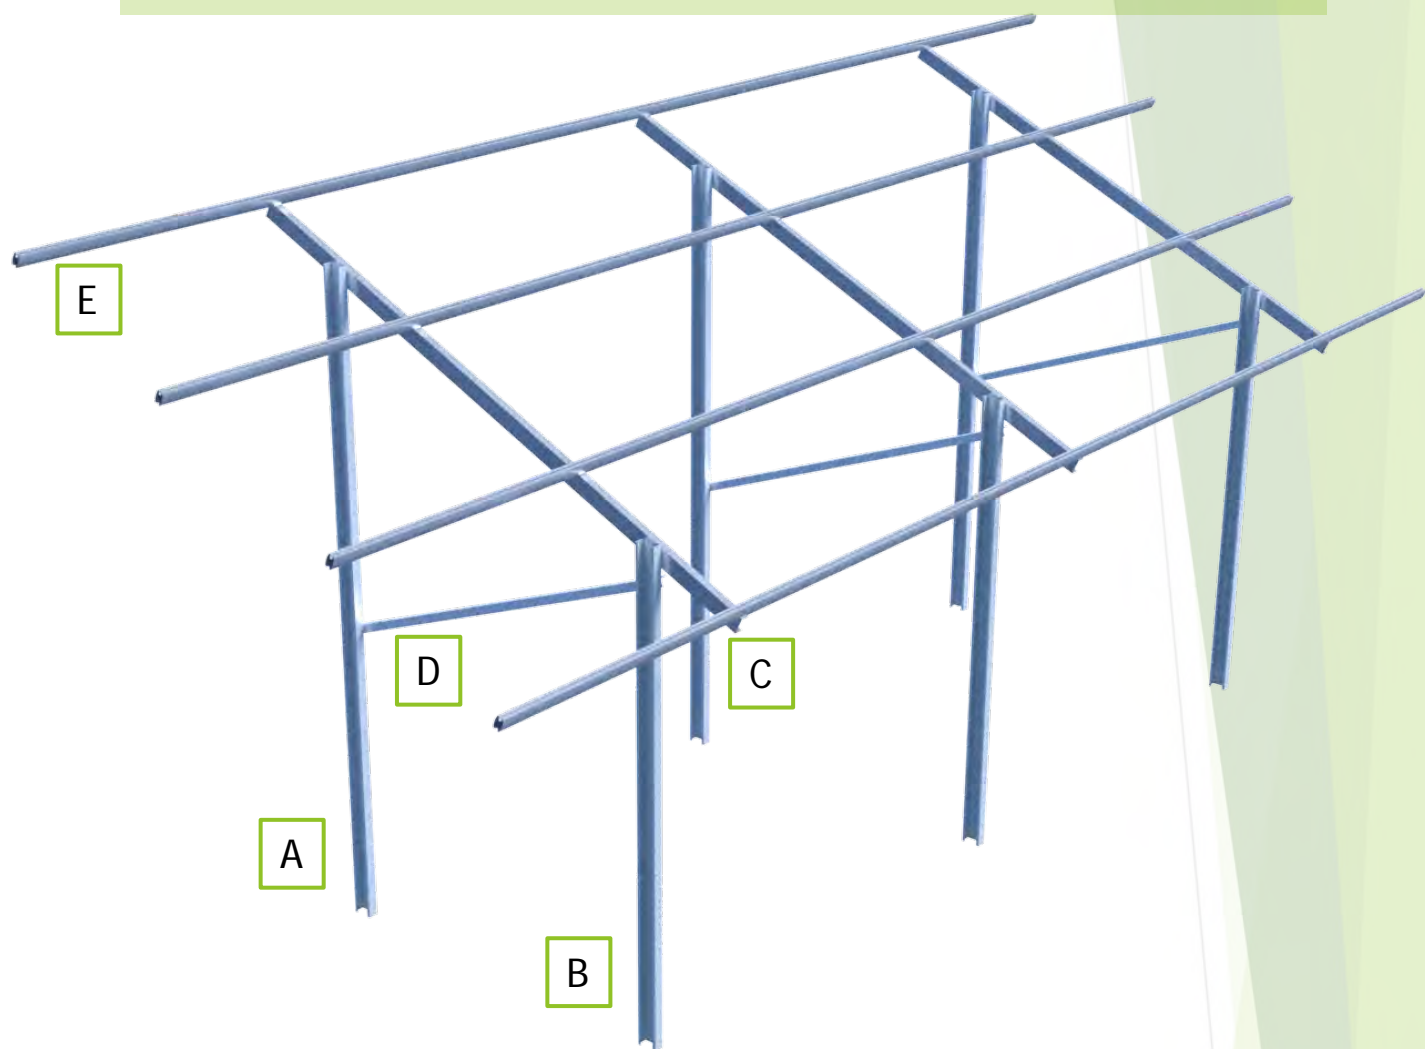



Hand Protection



Part	Technical Description	Image
A	<p>CST 80x40x15x3</p> <ul style="list-style-type: none">▪ Hot Galvanized (min. 55µm)<ul style="list-style-type: none">▪ S275▪ Length: Varies by application	
B	<p>CST 80x40x15x3</p> <ul style="list-style-type: none">▪ Hot Galvanized (min. 55µm)<ul style="list-style-type: none">▪ S275▪ Length: Varies by application	
C	<p>CST 80x40x3</p> <ul style="list-style-type: none">▪ Hot Galvanized (min. 55µm)<ul style="list-style-type: none">▪ S275▪ Length: Varies by application	

Part	Technical Description	Image
D	<p>CST Lx40x3</p> <ul style="list-style-type: none">▪ Hot Galvanized (min. 55µm)▪ S275▪ Length: Varies by application	
E	<p>Mounting Beam</p> <ul style="list-style-type: none">▪ ALU 60x40x2mm▪ Aluminium 6063T66▪ Length: Varies by application	
	<p>Module Support Beam Connectors</p> <ul style="list-style-type: none">▪ ALU 36x33x1.5mm▪ Aluminium 6063T66▪ Length: ~250mm	
	<p>Module Clamps</p> <p>Aluminum 6063T66</p> <p>Polycrystalline Clamps Middle Clamp - 50mm End Clamp - 50mm</p> <p>Thin Film Clamps Various Types</p> <p>Bolt(s) : DIN 912 M8 (Various Lengths depending on module thickness) - DIN 557 M8 A2</p>	

FFH 2P 2C 3000 - Parts List

Part	Image	Torque
DIN933 M10x30 HEX BOLT		~30 Nm** See Tightening Torque Chart
DIN934 M10 HEX NUT		N/A
DIN9021 M10.5 WASHER		N/A
9097 M8x25 Hammer Head Bolt		~25 Nm** See Tightening Torque Chart
DIN934 M8 HEX NUT		N/A
DIN125 M8.5 WASHER		N/A

Planning and Design


The Free Field (FF) 2P 2C mounting system is designed and engineered individually for each project site and location. A geotechnical and static study will need to be performed for each site in order to able to plan and design the mounting system.

For the mounting system installation there are certain tolerances that you will need to adhere to in order to make sure that the installation is completed correctly, and the project is built to standards.


Each site will need a general layout plan with ramming point positions and general layout plan of the mounting system. It is important to follow the design so that the system is installed correctly.

Following you will find examples of a general table layout and mounting system section layout.


Alpha Solar FFH 2P 2C 3000 - Mounting System Layout Example

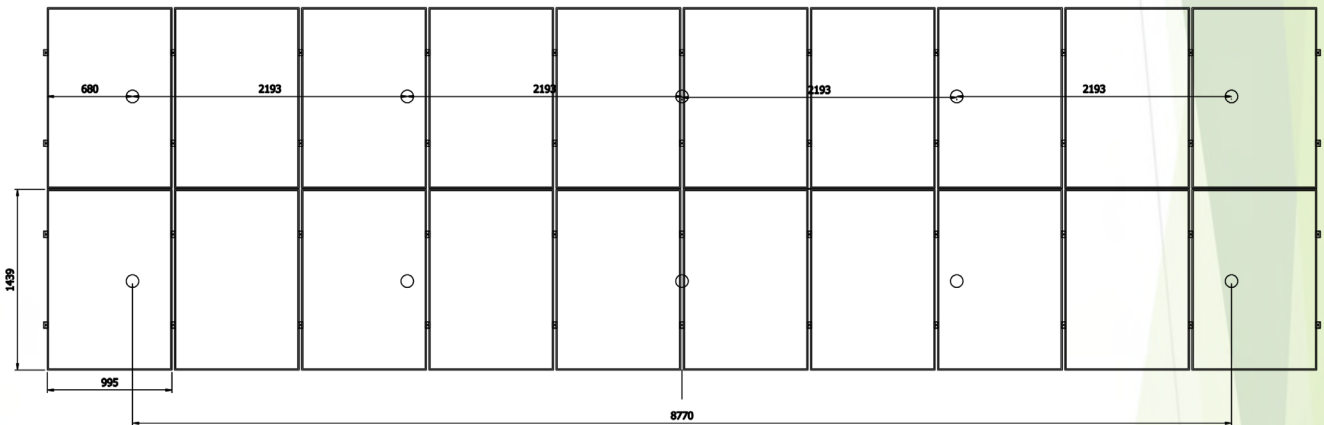


TOP VIEW
1:25

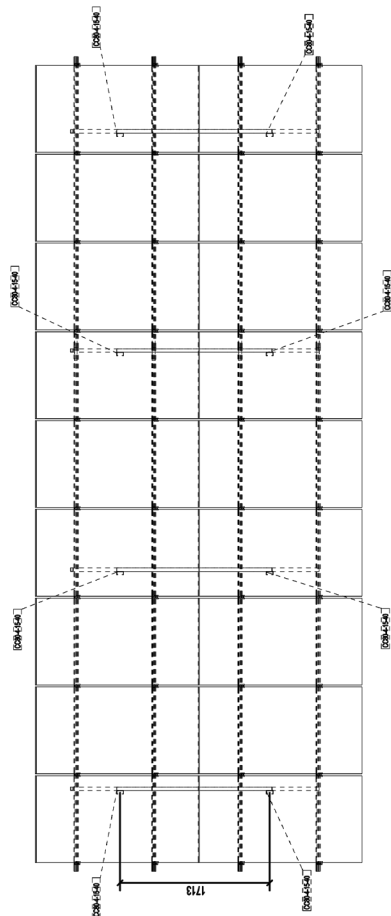


3D VIEW

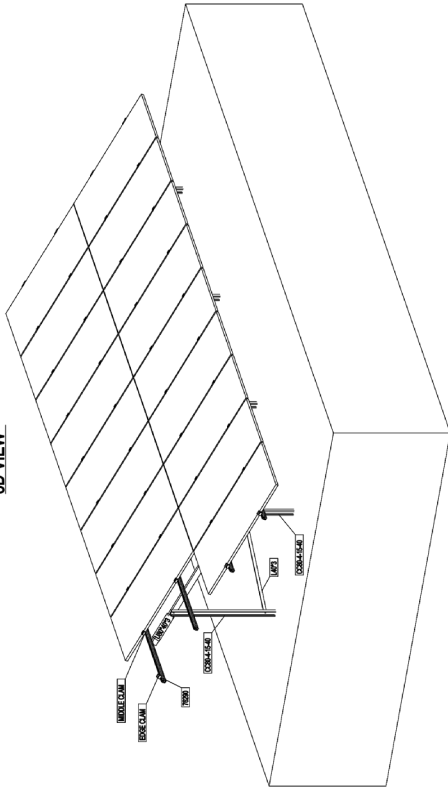


FRONT VIEW
1:25

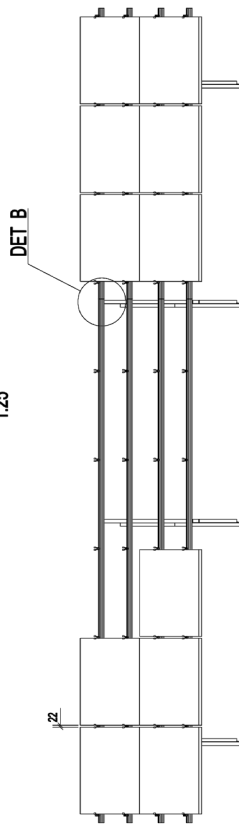


DET B

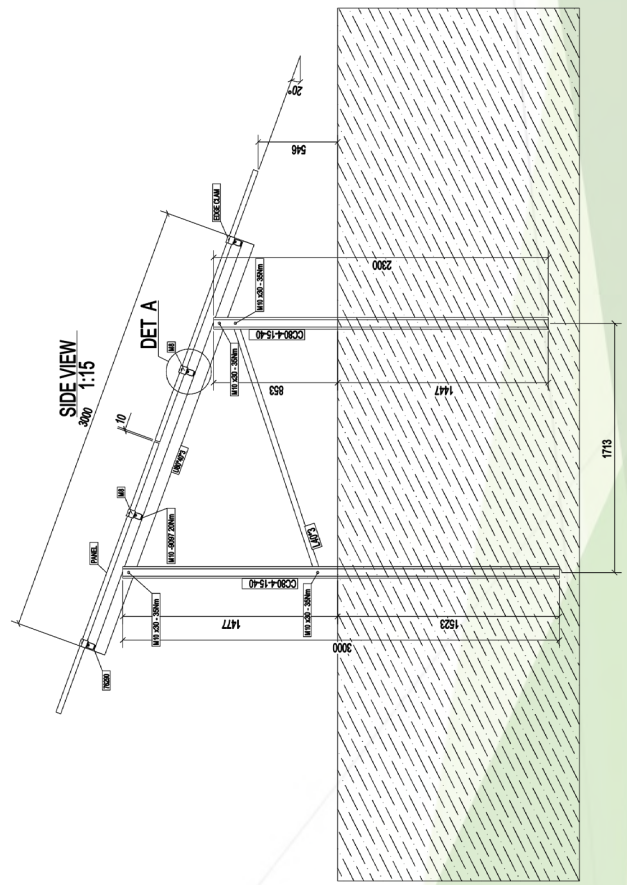

SIDE VIEW

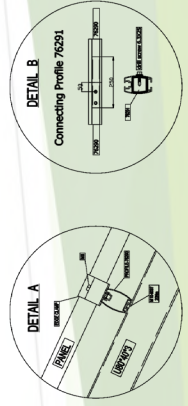


NO.	REV.	REVISION DESCRIPTION	DRAWN	CHECKED	APPROVED	REV. DATE
 Emirates Engineering Group						
DRAWING TITLE			GA DRAWING			
PROJECT NAME			ALPHA SOLAR 2P-3C			
DESIGNER			D.D			
PROJECT NO.			SCALE			
DRAWING NO.			[1]			
			REVISION NO. 0			

Alpha Solar FFH 2P 2C 3000 - Typical Model Example
Profiles may differ


1. 9097 M8x25 Hammer Head Bolt
DIN934 M8 HEX NUT
DIN125 M8.5 WASHER

2. DIN933 M10x30 HEX BOLT
DIN934 M10 HEX NUT
DIN9021 M10.5 WASHER x2

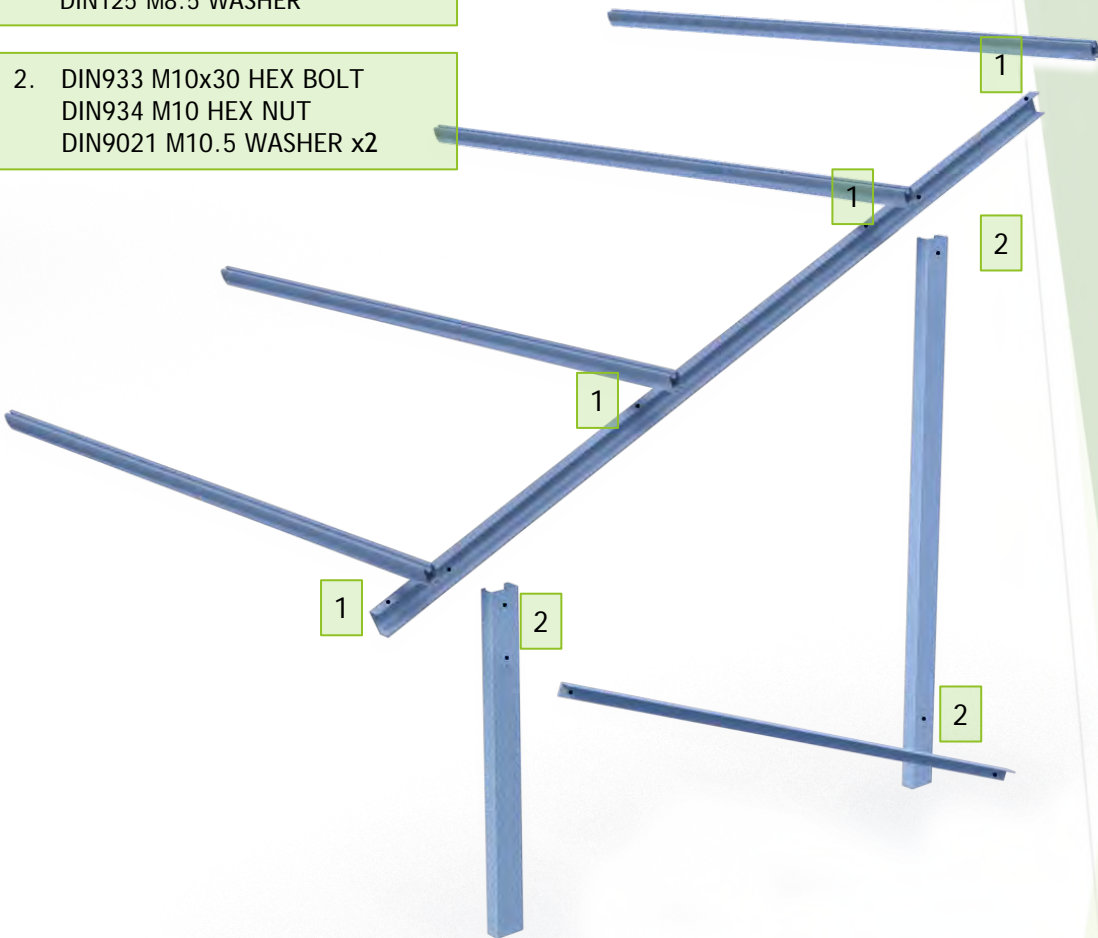


Ramming Post Tolerances	
Heigth	+/- 20mm
North / South	+/- 2 °
East / West	+/- 2 ° (5° Max)


INCORRECT INSTALLATION


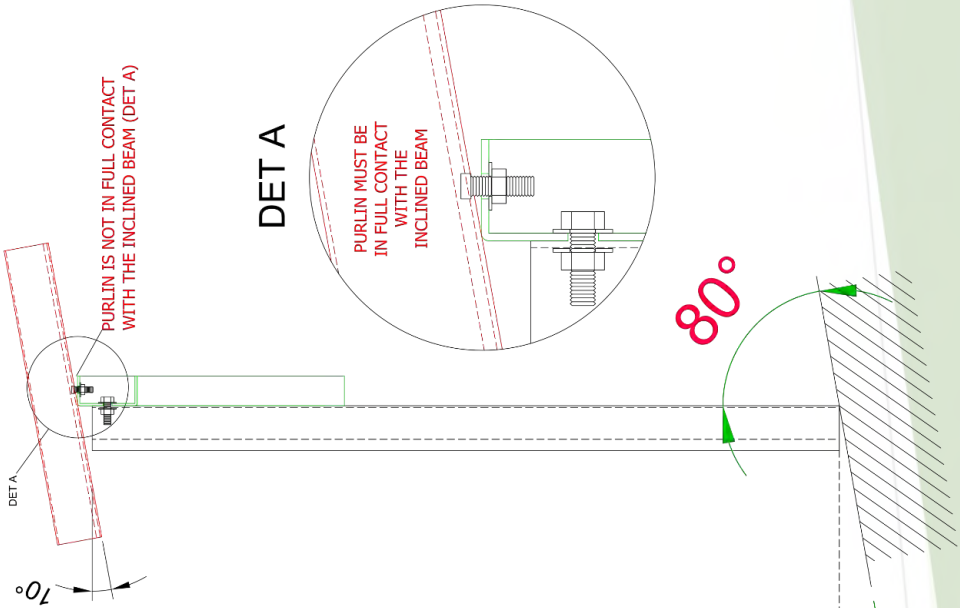


CORRECT INSTALLATION

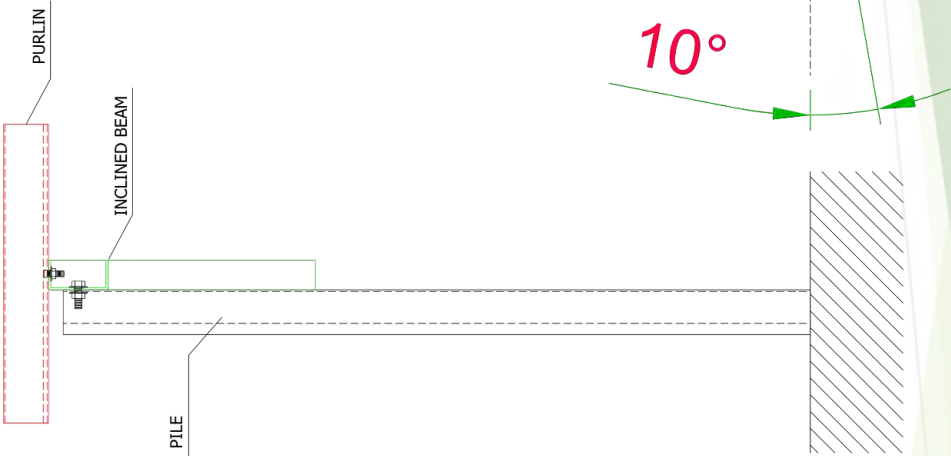


CORRECT INSTALLATION

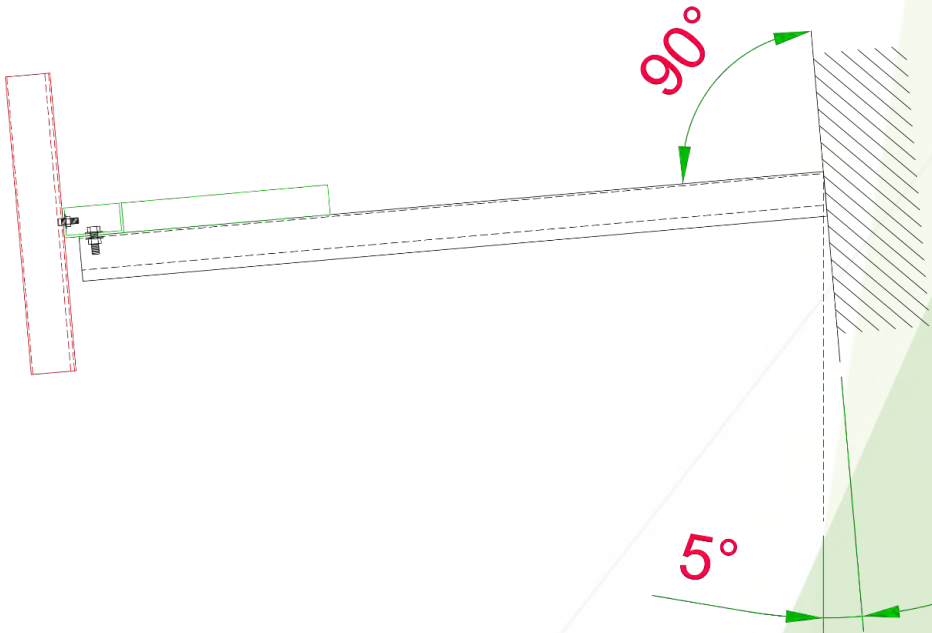

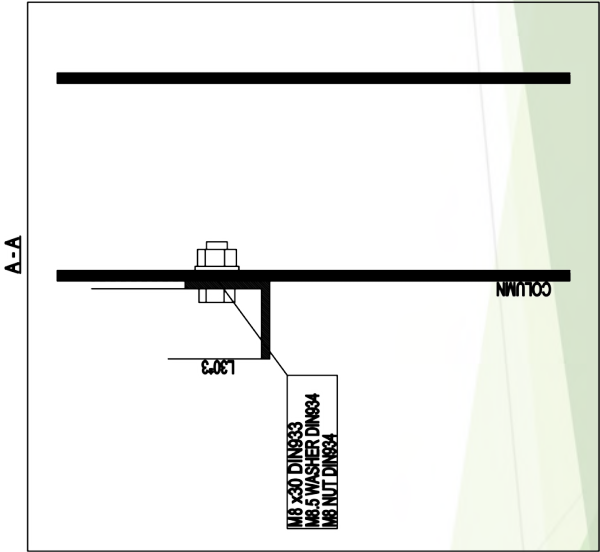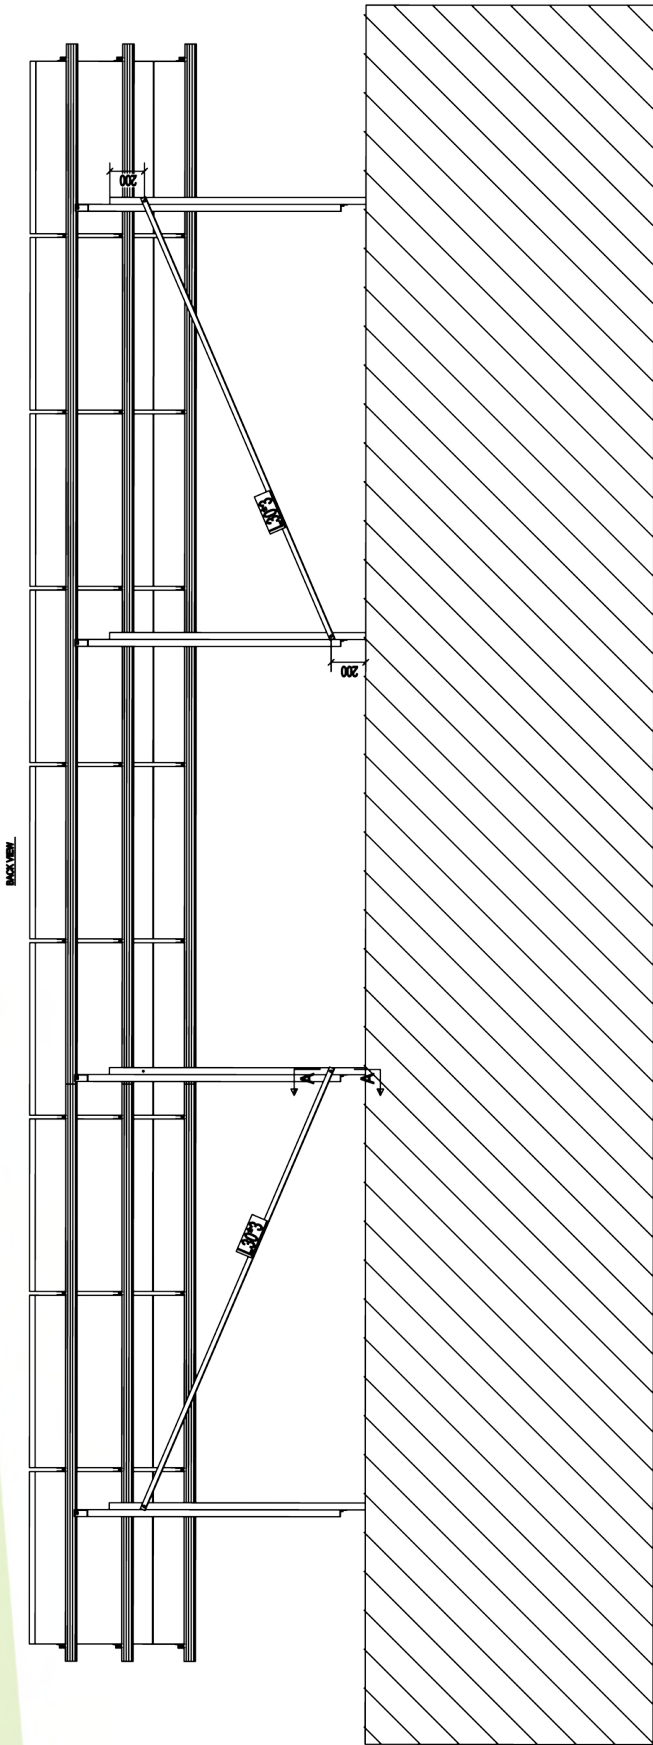

No.	REV.	DATE	REVISION DESCRIPTION	DESIGN	APPROVED	REV. DATE
TABLE BRACINGS - DETAIL						
DRAWING TITLE	ALPHA SOLAR SHEDDING SYSTEM					
PROJECT NAME	ALPHA SOLAR SHEDDING SYSTEM					
DESIGNER	DLD					
DATE	26.03.2021					
SCALE	1:1					
PROJECT No.	1118					
DRAWING No.	0					
REVISION No.	0					

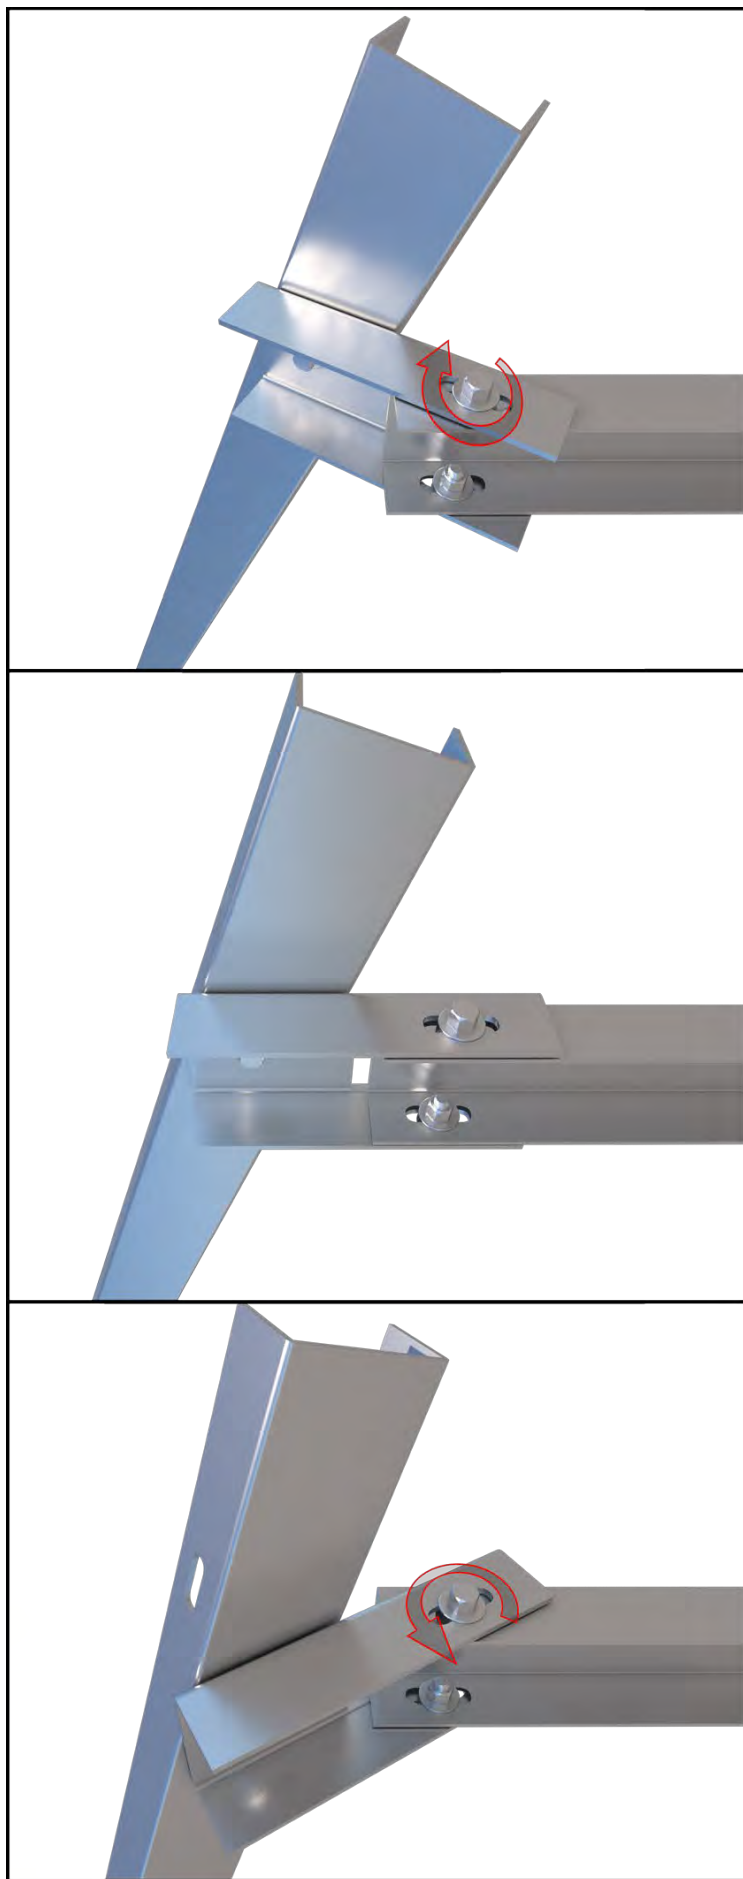

The slope adaptation accessory is used for mounting system installations that have large slopes with over 4 to 5 degrees inclination from East to West. This helps in making sure that all pertinent parts of the mounting system are connected securely.

Tools Needed for Assembly

Part	Technical Description	Image
1	Allen Wrench 6mm	
2	Torque Wrench	
3	Wrench 13mm and 17mm	



FFH 2P Preventative Maintenance

It is important for the mounting system to be checked every 12 months and to use a torque wrench to check the mounting cap bolts and other screws for proper tightened torque.

****Stainless Steel Fasteners - Pre-load and Tightening Torques**

Thread	Coeff Friction	Preload (Kn) Property class			Tightening Torque (Nm) Property class			Min Breaking Torque		
		A1-50	A2-70	A4-80	A1-50	A2-70	A4-80	A1-50	A1-70	A4-80
M10.0	0.1	9.32	20	26.6	13.7	30	39.4	46	65	74
	0.2	7.58	16.2	16.2	20.3	44	58			
	0.3	6.14	13.1	13.1	24	51	69			
M8.0	0.1	5.86	12.6	12.6	6.8	14.5	19.3	23	32	37
	0.2	4.75	10.2	10.2	10.1	21.4	28.7			
	0.3	3.85	8.85	8.85	11.9	25.5	33.9			

Alpha Solar FFH 2P 2C 3000



1st Industrial Area
OT 1819, Volos TK38500
Greece

T/F: +30 24210 85233
@: info@emmanouil.gr